

SV 200 NEO

SPL MIDRANGE

500 W





TECHNICAL SPECIFICATIONS

Component		SPL Midrange
Size	mm (in.)	200 (8)
	W peak	500
Power Handling	W continuous	200
	Impedance	Ω
Frequency Response	Hz	100 ÷ 8k
Sensitivity	dB/SPL	100
Magnet size D x d x h	mm	80 x 50 x 6
	(in.)	(3.15 x 1.97 x 0.24)
Voice Coil \varnothing	mm (in.)	38,6 (1.5)
Magnet	Neodymium	
Cone	Water repellent pressed paper	
Weight of one component	kg (lb.)	1,2 (2.65)

1. Compact dimensions and light weight preserving excellent performance thanks to the use of Neodymium N38 H for the motor units
2. Cones waterproofing and anti-UV treatment to allow safe outdoor use without discoloration over time
3. Motor units treated with cataphoresis and insulated lead-wires to avoid oxidation
4. Terminals and mounting holes compatible for installation on Harley-Davidson motorbikes

ELECTRO-ACOUSTIC PARAMETERS

D	mm	168
Xmax	mm	2,7
Re	Ω	3,2
Fs	Hz	103
Le	mH	0,06
Vas	l	8,1
Mms	g	19,9
Cms	mm/N	0,12
BL	T·m	8,8
Qts		0,52
Qes		0,55
Qms		7,4
Spl	dB	100

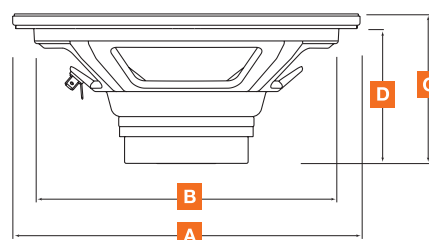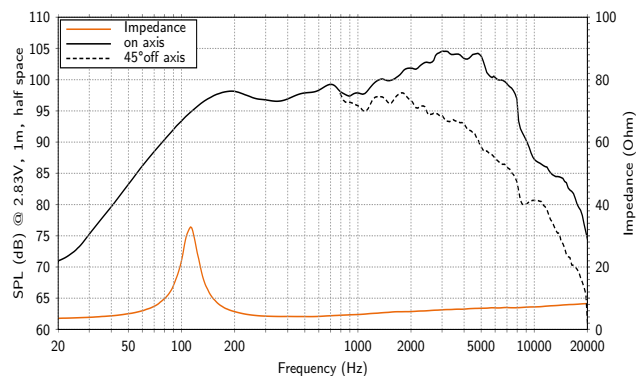

A	208 mm	8.19 in.
B	182,7 mm	7.19 in.
C	96,2 mm	3.79 in.
D	83,8 mm	3.3 in.