

UTOPIA M TBM

Technical Sheet

Tweeter




- 'Beryllium 'M'-shape inverted dome
- 'TMD' surround
- IAL or sealed volume
- Flush mounting support included

SPECIFICATIONS

Nominal power	20W
Maximum power	200W
Sensitivity (2.83V/1m)	95dB
Nom. impedance	4Ω
Dome	Pure Beryllium 'M'-shape
Surround	Rubber, TMD
DC resistance	4Ω
VC diameter	25mm 1"
Former	Kapton
Layers	2
Wire	Alu
Net weight	120g 0.2lbs

MECHANICAL DRAWING


Dimensions in mm

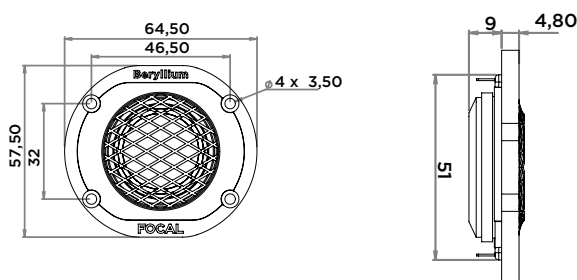

PARAMETERS IAL

Rdc	4Ω
Fs	280Hz



FREQUENCY RESPONSE/IMPEDANCE

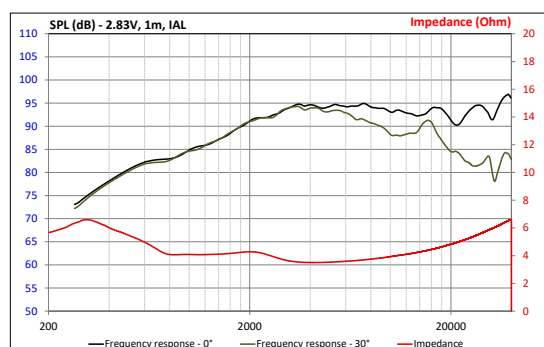

PARAMETERS SMALL VOLUME

Rdc	4Ω
Fs	1,550Hz


FREQUENCY RESPONSE/IMPEDANCE

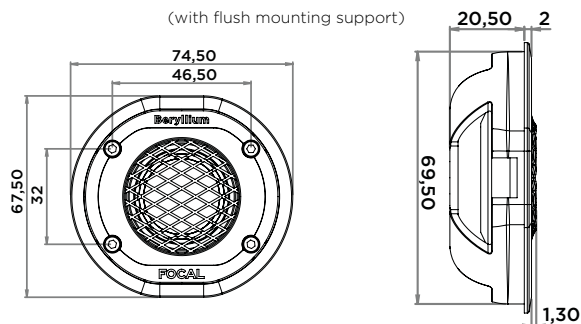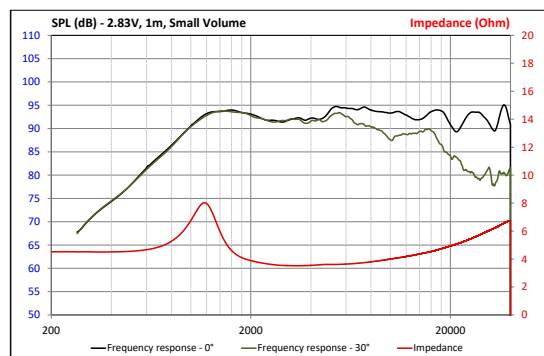

UTOPIA M TBM

Product Data Sheet

MADE IN
FRANCE

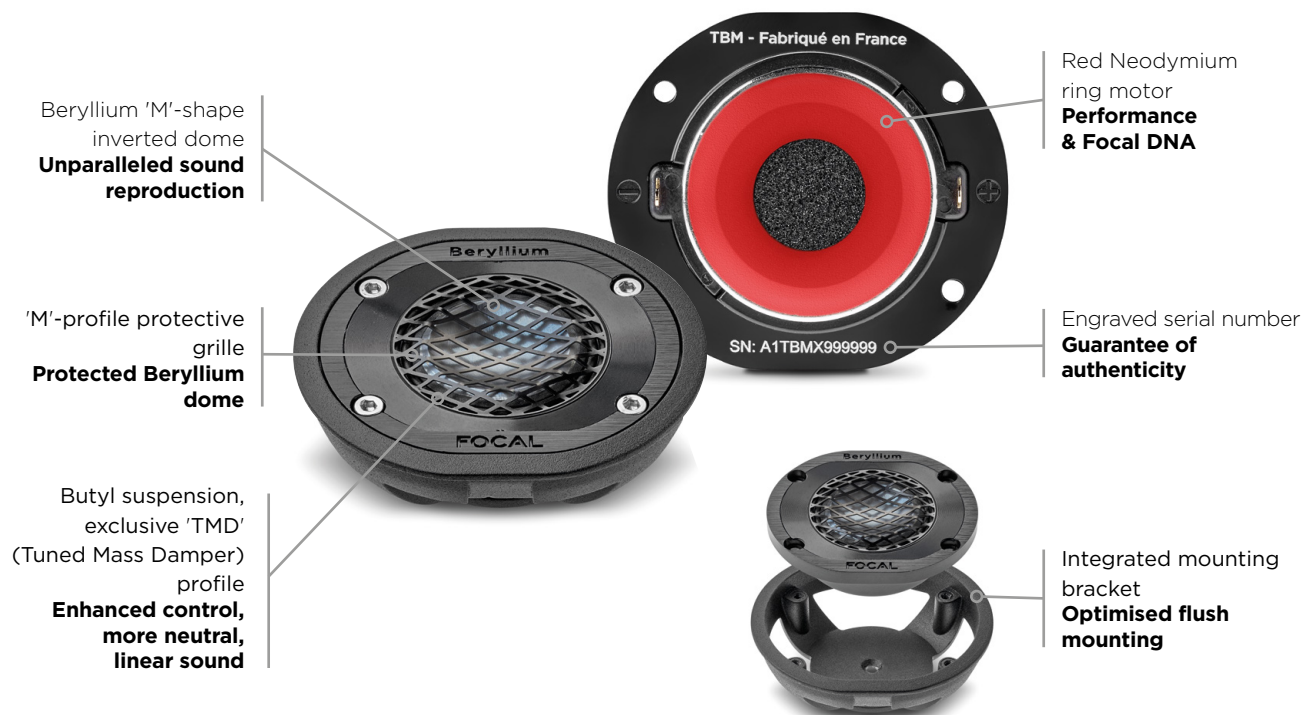

Key points

- Beryllium 'M'-shape inverted dome tweeter
- 'TMD' suspension
- Frequency response: 1.5kHz - 50kHz
- Integrated mounting bracket



Type	Tweeter
Voice coil diameter	(1") 25mm
Motor	Neodymium
Cone	'M'-shape Beryllium dome
Suspension	Tuned Mass Damper (TMD®)
Impedance	4Ω
Max. power	200W
Nom. power	20W
Sensitivity (2.83V/1m)	95dB
Frequency response	1.5kHz - 50kHz
Accessories	Bracket and mounting screws supplied